




Panel profile

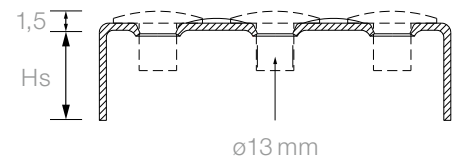

1:1 pattern

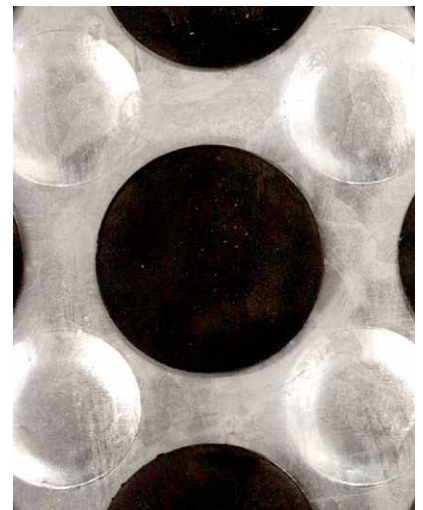


one step ahead 



# Type G

## Safety gratings

Planks and safety gratings Type G are identified by the raised surface and holes for rubber plugs or drainage. Type G is used where a closed and slip resistant surface is required. Planks and gratings Type G, with rubber plugs find particular use in damp rooms. The planks may be used either as individual elements or welded together to form grating panels.

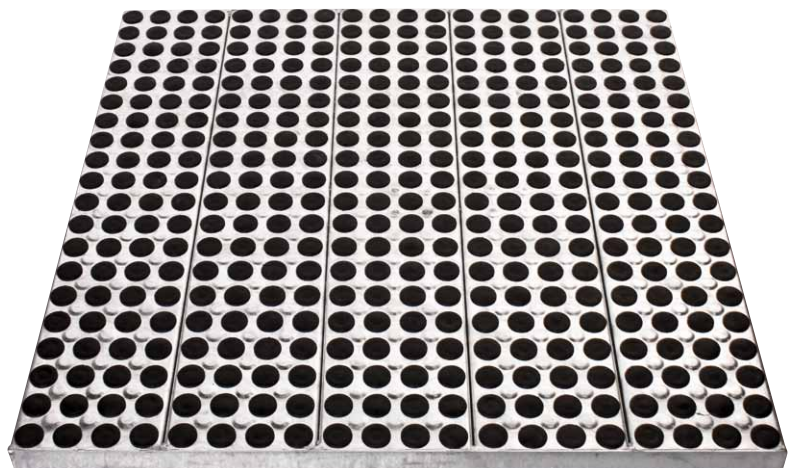

# Safety gratings Type G

## Qualities

---

Slip resistant

---

User-friendly

---

With rubber plugs

---

Customized orders

---

Closed surface

---

## Applications

---

Buildings

Swimming baths - Office/Stainless steel

---

## Technical data

---

% of daylight

~ 0%

---

Standards and norms

EN 1991

---

## Materials

---

Steel 240 YP

Non-galvanized - Galvanized

---

## Accessories

---

Other

Kick flat system

---

## Dimensions - Panels- Steel 240 YP

---

Panel width (Pw)

150    200    250

---

Panel height (Ht)

42    44    42

---

Material thickness

3    3    3

---

mål i mm